



The Cyclone pump is capable of pumping up to 25 feet from ground level by simply connecting it to a 12 volt battery. Its reliable design is suitable for continuous sampling or purging of groundwater wells.

***Simplify and Expedite Your Next Sampling Event!***

The Cyclone can pass sand, small rocks and debris without getting clogged or damaging the pumps motors!

The Cyclone can run continuously without the need for a cool down! Unlike, the competition.


The Cyclone can also run dry for up to two hours without motor damage!

The Cyclone has a 400 hour motor life! That is twice as long as the competition!

The Cyclone has a sleek outside that minimizes well hang-ups.

The Cyclone is a very reliable and economical pump that provides a great bang for your buck!

The Cyclone comes ready for field use; with 35 feet of heavy duty wire, alligator battery clamps and it is shipped in its own box.

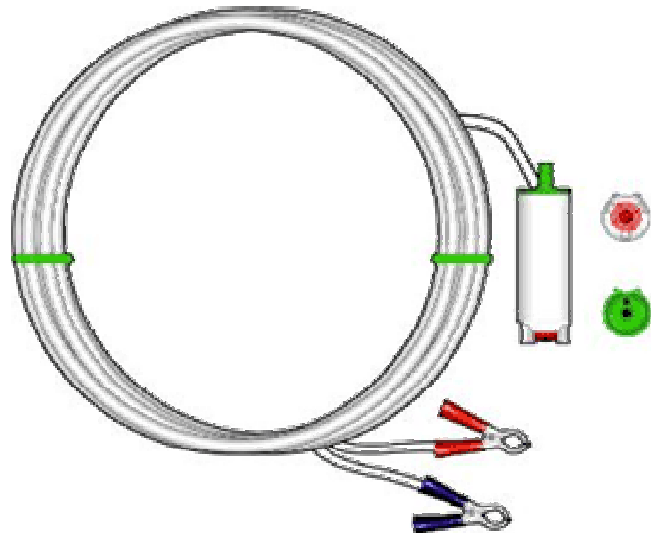

**SPECIFICATIONS**

POWER CONSUMPTION:	40-50 WATTS (MAX)
VOLT RECOMMENDATION:	12-15 At Source
MAXIMUM AMP OUTPUT:	4 AMPS
MEASUREMENTS:	LENGTH 5" / DIAMETER: 1.8"
CONSTRUCTED:	PVC PLASTIC & STAINLESS STEEL
DISCHARGE OUTLET:	3/8" ID x 1/2"ID (WITH BARBED TIP ENLARGER)
SUPPLIED WITH:	35 FEET OF HEAVY DUTY 12 GAUGE WIRE & BATTERY CLAMPS

**Cyclone Pump Chart**

**PUMPING DEPTH (DTW) GALLONS PER MINUTE**

3	2.00
10	1.00
20	.35
25	.25
30	N/A