

PROACTIVE ENVIRONMENTAL PRODUCTS-PROACTIVE PUMPS



The Tsunami pump is capable of pumping up to 100 feet from ground level by simply connecting the pump to our revolutionary Power Booster II Controller or The Low Flow With Power Booster II Controller.

The Tsunami's reliable design is suitable for continuous sampling or purging of groundwater wells.

Simplify and Expedite Your Next Sampling Event!

The Tsunami can pass sand, small rocks and debris without getting clogged or damaging the pumps motors!

The Tsunami can run continuously without the need for a cool down! Unlike, the competition.

The Tsunami can also run dry for up to two hours without motor damage!

The Tsunami has a 400 hour motor life!

The Tsunami has a sleek outside that minimizes well hang-ups.


The Tsunami is a very reliable and economical pump that provides a great bang for your buck!

The Tsunami comes ready for field use; with 110 feet of heavy duty wire and Power Booster II adapter and it is shipped in its own box.

SPECS:

POWER CONSUMPTION:	260 WATTS (MAX)
VOLT RECOMMENDATION:	12-15 At Source
MAXIMUM AMP OUTPUT:	11 AMPS
MEASUREMENTS:	LENGTH 14.5" / DIAMETER: 1.8"
CONSTRUCTED:	PVC PLASTIC & STAINLESS STEEL
DISCHARGE OUTLET:	3/8" ID OR 1/2" ID POLY TUBING CAN BE USED
SUPPLIED WITH:	110 FEET OF HEAVY DUTY 12 GAUGE WIRE & THREE PRONG MALE ADAPTER

PROACTIVE ENVIRONMENTAL PRODUCTS-PROACTIVE PUMPS

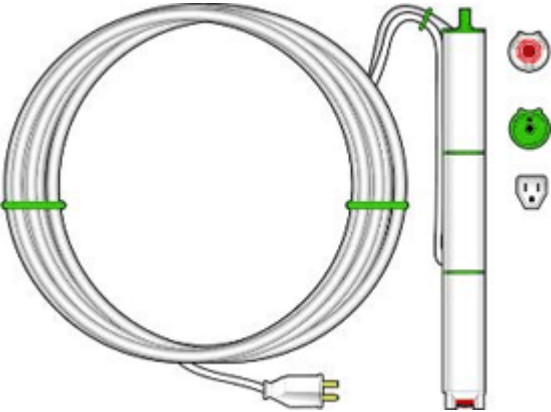

Tsunami Pump Chart	
PUMPING DEPTH (DTW)	GALLONS PER MINUTE
3	4.3
10	4.0
20	3.8
30	3.6
40	3.2
50	3.0
60	2.2
70	2.0
80	1.25
90	1.0
100	N/A