


“Your Needs Are Our Business”

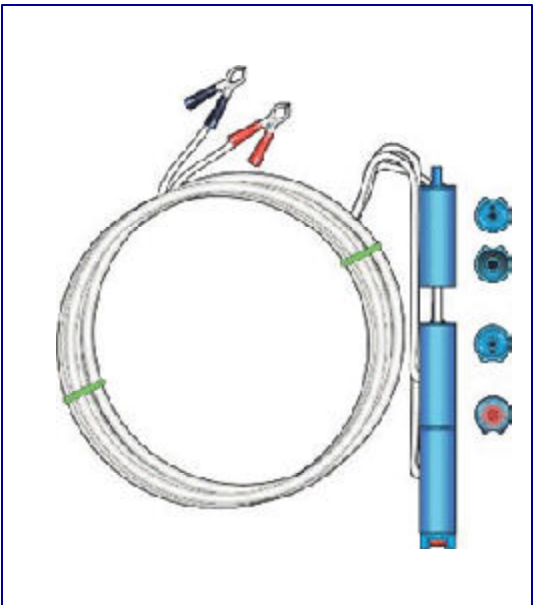

Toll-Free
800-393-4009

Water Spout II
Double Bottom Booster Pump

The Water Spout I Double Bottom Booster Pumps is designed for the field technician to build a complete Water Spout II Complete. By simply connecting the Single Inline Top pump with the Double Bottom Booster pumps will produce a Water Spout II Complete Pump.

Then, simply connect the pump to a 12 volt battery to energize the pump. Its reliable design is suitable for continuous sampling or purging of groundwater wells.

The Water Spout I Double Bottom Booster Pumps can pass sand, small rocks and debris without getting clogged or damaging the pump motors. It can run continuously without the need for a cool down! Unlike, the competition and also run dry for up to two hours without motor damage!

The Water Spout I Double Bottom Booster Pumps has a 400 hour motor life and a sleek outside that minimizes well hang-ups.

The Water Spout I Double Bottom Booster Pumps is a very reliable and economical pump that provides a great bang for your buck!

SPECIFICATIONS

POWER CONSUMPTION: 120 WATTS
(MAX) VOLT RECOMMENDATION: 12 - 15 At Source
MAXIMUM AMP OUTPUT: 7 AMPS
MEASUREMENTS: LENGTH 10" / DIAMETER: 1.8"
CONSTRUCTED: PVC PLASTIC & STAINLESS STEEL
DISCHARGE OUTLET: 3/8" ID OR 1/2" ID POLY TUBING CAN BE USED

Pumping Depth	Gallons Per Minute
3	3.20
10	2.75
20	2.50
30	2.00
40	1.50
50	.75
60	.25
70	N/A

99 Miller Avenue

Braddock, PA 15104

800-393-4009

Fax 412-271-5083

info@
fieldenvironmental.com

Visit us soon on the web
www.
fieldenvironmental.com

Inquiries and
orders
800-393-4009