

PROACTIVE ENVIRONMENTAL PRODUCTS-PROACTIVE PUMPS



The Mega-Typhoon pump is capable of pumping up to 80 feet from ground level by simply connecting the pump to our revolutionary Econo-Booster, Power Booster I Controller, or our latest edition The Low Flow With Power Booster I Controller. All these Power Boosters do the same function, which is increase 12 volts to a constant 19 volts. This in return, will make your next groundwater sampling event go much quicker when it comes to purging a well. And with our Low Flow With Power Booster I Controller, the field technician now has the ability to control the flow of water being discharged from the Mega-Typhoon thus, keeping up with EPA groundwater standards for Low Flow Sampling.

The Mega-Typhoon's reliable design is suitable for continuous sampling or purging of groundwater wells.

***Simplify and Expedite Your Next Sampling Event!***

The Mega-Typhoon can pass sand, small rocks and debris without getting clogged or damaging the pumps motors!

The Mega-Typhoon can run continuously without the need for a cool down! Unlike, the competition.

The Mega-Typhoon can also run dry for up to one hour without motor damage!


The Mega-Typhoon has a 400 hour motor life!

The Mega-Typhoon has a sleek outside that minimizes well hang-ups.

The Mega-Typhoon is a very reliable and economical pump that provides a great bang for your buck!

The Mega-Typhoon comes ready for field use; with 90 feet of heavy duty wire and Power Booster I adapter and it is shipped in its own box.

**Did you know??**  
The Mega-Typhoon can be used for Low Flow Sampling???

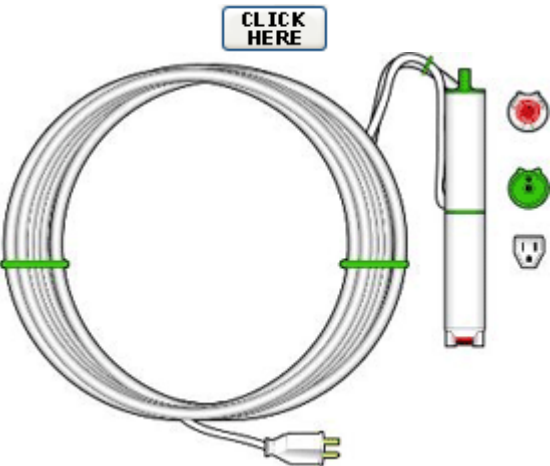

**Mega-Typhoon Pump Chart**

PUMPING DEPTH (DTW)	GALLONS PER MINUTE
3	4.0
10	3.5
20	3.1
30	3.2
40	2.0
50	1.5
60	1.0
70	.50
80	.25
90	N/A

**SPECS:**

POWER CONSUMPTION:	170 WATTS (MAX)
VOLT RECOMMENDATION:	12-15 At Source
MAXIMUM AMP OUTPUT:	9 AMPS
MEASUREMENTS:	LENGTH 9.5" / DIAMETER: 1.8"
CONSTRUCTED:	PVC PLASTIC & STAINLESS STEEL