



Groundwater Monitoring Solutions

Diver



Groundwater Management System

Water depletion, excess water (flooding), salinization and shortage of clean drinking water. Today these problems occur with growing frequency world-wide. Regular and reliable measuring and monitoring of groundwater levels has therefore become more important than ever before. The Diver, by Van Essen Instruments – part of Schlumberger Water Services (SWS) – is the ideal instrument for this purpose.

The Diver is a robust and compact datalogger for the automatic, accurate and reliable monitoring of groundwater levels. The Diver is available in a range of different models that can measure temperature and groundwater level. Depending on the model, the water conductivity can also be measured. In this way salinization and saltwater intrusion are simple to monitor.

Schlumberger Water Services

The Diver is part of a full range of products and services which are marketed by Schlumberger Water Services. In addition to a diverse product range, SWS also has build up many years of know-how and experience with Aquifer Storage and Recovery (ASR) and monitoring projects.


It goes without saying that this know-how and experience is available to support you in choosing a groundwater monitoring system. SWS offers more than consultancy alone, and can also take care of installation, data collection and maintenance of complete monitoring networks.

The policy of SWS is to constantly innovate our existing product range to market demands as well as initiating new developments. In this way you will always be assured of receiving proven and advanced technology from SWS, your reliable partner in present and future projects.

Suitable for any environment


Divers incorporate the full experience built up by SWS in groundwater systems over many decades. These high-quality dataloggers are hermetically sealed to external effects, so moisture and/or electrical influences cannot affect the measurement result. The following four Diver models are available to suit various environments and areas of application.

- Mini-Diver
- Micro-Diver
- Cera-Diver
- CTD-Diver

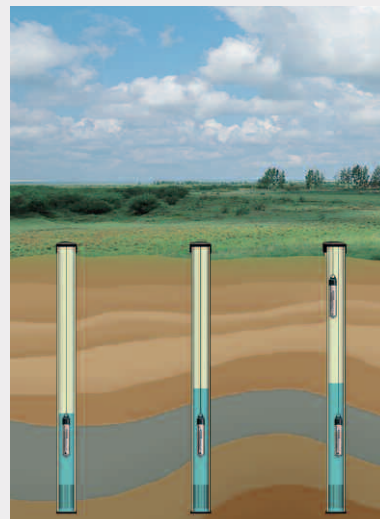

Accuracy of measurement

The Diver monitors the groundwater level by measuring the pressure of the water column with a pressure sensor to an accuracy up to 0.05% FS (Full Scale). In addition to a pressure sensor and a temperature sensor, the CTD-Diver is equipped with a four-electrode sensor for determining the conductivity. In order to determine the groundwater level, the prevailing air pressure must be compensated by means of the BaroDiver. The Compensation Wizard in Logger Data Manager (LDM) compensates the barometric measurement data from the BaroDiver. The result: continuous and highly reliable measurements.

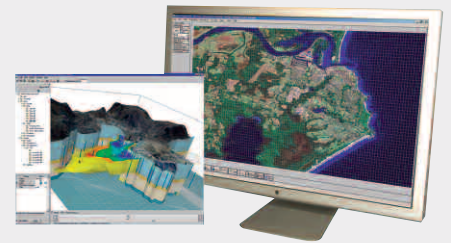

Installation, programming and readout

Diver dataloggers are simply suspended in a monitoring well from a steel wire or Diver Data Cable (DDC). Once installed the monitoring system is completely invisible above ground, reducing the risk of vandalism.

For programming of the Diver and for compensation and readout of measured data, SWS offers LDM software package for laptop or PC applications, and the Pocket-Diver package for PocketPC.

Micro-Diver datalogger



Applications:

- Monitoring projects
- Groundwater monitoring network automation
- Pumping tests

Micro-Diver: small in size, great in performance

With its length of 90 mm and diameter of only 18 mm, the Micro-Diver is the smallest Diver that is capable of recording groundwater levels and groundwater temperatures with extreme accuracy. The Micro-Diver is specifically designed for monitoring wells too small to accommodate larger data loggers. In spite of its small size, the Micro-Diver possesses a memory capacity of 48,000 measurements per parameter, sufficient to enable it to perform almost one measurement every ten minutes for a whole year. The built-in battery has a lifespan of about 10 years. With its range of measuring functions, the Micro-Diver can be used both for fixed, event-dependent and averaging as well as pump test measurements.



Highlights:

- 3 year warranty
- Long-term and frequent measurements
- Various measurement methods:
 - fixed
 - event dependent
 - averaging
 - pumping tests
- Temperature corrected measurement
- Reliable and accurate measurement data
- Large memory capacity (non-volatile)
- Compact size
- Suitable for 19 mm monitoring wells
- Hermetically sealed in stainless steel housing
- Free of maintenance

Specifications:

Dimensions	Ø18 mm x 90 mm
Memory	48,000 measurements (non-volatile)
Sample rate *	0.5 sec to 99 hours
Housing material	RVS 316L
Pressure sensor material	ceramic (Al ₂ O ₃)
Temperature range	-20 °C to 80 °C
- accuracy	±0.1 °C
- resolution	0.01 °C
- compensated range	0 °C to 40 °C
Battery life	10 years (depending on use)
Weight	60 grams



Micro-Diver® Technical specifications (pressure)

Type	DI 601	DI 602	DI 605	DI 610	DI 500 (Baro)
Range	10 m H ₂ O	20 m H ₂ O	50 m H ₂ O	100 m H ₂ O	1.5 m H ₂ O
- accuracy**	1 cm H ₂ O	2 cm H ₂ O	5 cm H ₂ O	10 cm H ₂ O	0.5 m H ₂ O
- resolution	0.2 cm H ₂ O	0.4 cm H ₂ O	1 cm H ₂ O	2 cm H ₂ O	0.1 cm H ₂ O

* various measuring methods available (fixed, event based, averaging and pumping tests)

** within temperature compensated range

Accessories




Reading Unit

When the Diver is installed in the monitoring well by means of steel wire, the measured data can be readout on a PC, laptop or PocketPC with a Reading Unit equipped with a USB output. The dedicated software can also be used to program the Diver in the field or in the office. For reading and/or programming purposes, the mounting cap is removed from the Diver and the datalogger is placed in the Reading Unit. Subsequently the stored data can be readout and if necessary the Diver can be re-programmed.

Diver Data Cable

For optimized usability the Diver Data Cable (DDC) can be used. This makes it possible to read or program the Diver at the top of the monitoring well without withdrawing the instrument. The DDC is compatible with all Diver models and is available in several lengths up to 300 metres. In order to readout the Diver, a PC, laptop or PocketPC is connected to the DDC by an interface cable. The stored data can then be readout and if necessary the Diver can be re-programmed.

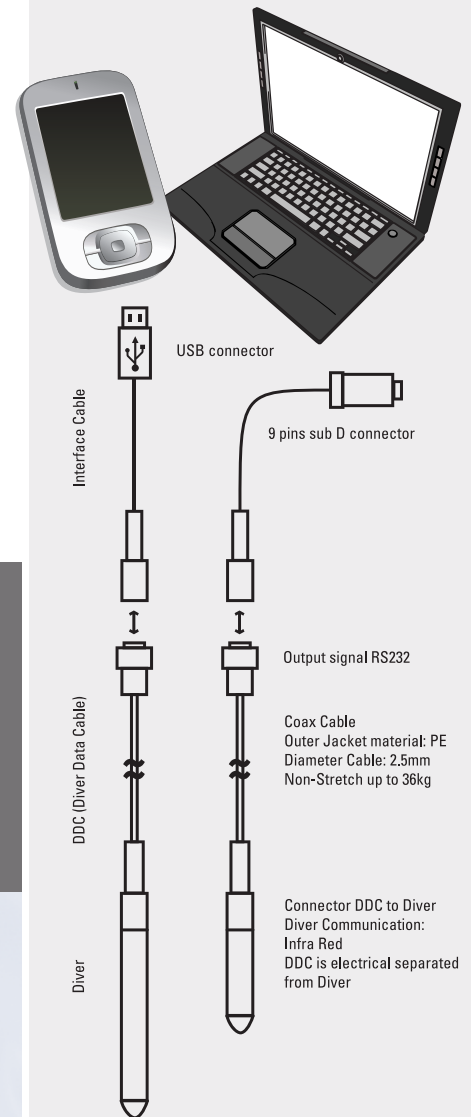



LoggerDataManager

To manage all your Diver data

The Logger Data Manager software package simplifies readout and programming of the Diver. These tasks can be done through a Reading Unit or directly through the Diver Data Cable and interface cable connected to a PC, laptop or PocketPC.

Programming

- Measuring site
- Instrument code
- Measurement method and frequency
- Direct or future start

Readout

- Groundwater level
- Groundwater temperature
- Electrical conductivity (CTD-Diver)
- Times of measurements

Data management and processing

- Smart Future Start
- Programming Divers, measuring sites and series
- Storing measurement data (name, code, height, assigned BaroDiver)
- Connecting multiple measuring sites to a given BaroDiver location
- CTD Calibration Wizard
- Barometric Compensation Wizard
- Manual measurement
- Graphical or tabular display or printout
- Export function for further processing
- Various export formats (e.g. CSV, MON, NITG)

Program & Readout






Table Visualization of Data



Graphical Visualization of Data



Pocket-Diver

Simple software solution for on the field

Pocket-Diver is a software package that can be used on a PocketPC for programming Divers and reading stored measurements. Pocket-Diver comes in two variants: the 'Pocket-Diver Reader' enables you to read data, while 'Pocket-Diver Manager' also includes the Diver programming facility. For this purpose, the Divers must be connected to a Reading Unit or through an interface cable to the Diver Data Cable.

Programming

- Measuring site
- Instrument code
- Measurement frequency and method
- Direct or future start


Readout

- Groundwater level
- Groundwater temperature
- Electrical conductivity (CTD-Diver)
- Times of measurements


Data management and processing

- Smart Future Start
- Barometric Compensation Wizard
- CTD-Diver Calibration Wizard
- All measured parameters of a series in a single graph
- Various export formats (CSV and MON)
- Software co-supplied
- Manual measurement

Program & Readout



Graphical Visualization



Adjusting Projects

