

Torquer Well Plugs

Ingenious, reliable locking mechanism,
no moving parts
Bright highly visible safety color
Manufactured from an engineering
grade polymer blend, same grade used
in industry to replace steel gears
Light weight yet super strong
Easily convertible to accept your
pressure or vacuum gauges and
threaded fittings
Super pricing
Ultra high chemical and temperature
resistant properties
Comfort grip, easy on, easy off wing
nut design
High-Tech liquid tight seamless dual
rubber gasket
Superior design, plug will not separate
in the well while removing
No metal parts
Instrument tethering attachment at base
Custom / private labeling to your
specifications. See your company
name, logo, phone number, ect. on the
highest quality locking well plugs
Easily disassembled and reassembled
in the field for total decontamination
Flush OD design assures easy well
installation. Lasso around the wing nut
and install or abandon your well using
your winch or cat lines
Accepts #1 or #3 type pad locks

2 Instrument tethering attachments at T2.5 - 2 1/2" Well Plug
base

No metal parts




T1 - 1" Well Plug



Sizes

T.5 - 1/2" Schedule 40 & 80
T.75 - 3/4" Schedule 40 & 80
T1 - 1" Schedule 40 & 80
T1.25 - 1 1/4" Schedule 40 & 80
T1.5 - 1 1/2" Schedule 40 & 80
T2 - 2" Schedule 40
T280 - 2" Schedule 80
T2.5 - 2 1/2" Schedule 40 & 80
T4 - 4" Schedule 40
3", 5", 6" coming soon

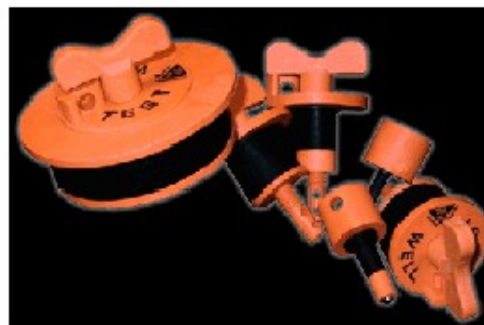

Well Plug Product Family