



## dipper-See H<sub>2</sub>GO Specifications

Physical Attributes	
Diameter	32mm (1.25")
Length	195mm (7.65")
Weight	325g (0.72lbs)

Wetted Materials	
PFAS Free Wetted Materials	This product is manufactured with wetted materials not known to contain PFAS
Body	Marine Grade 316 Stainless Steel
Cap	Delrin
Lenses	Plexiglass
O-Rings	Rubber Buna

Carry Case	
Material	Lightweight NK-7 Polypropylene
Exterior Dimensions	
Length: Width: Height:	321mm (12.6") 229mm (9.0") 111mm (4.4")
Warranty	Conditional Lifetime Guarantee


Camera	
Battery	Single Integrated Rechargeable Lithium Ion Battery (Up to 4.5 Hours of Run Time)
Resolution	1920x1080p HD
Colour	Full Colour Standard
Frame Rate	30FPS (Frames Per Second)
Video Format	MP4
Image Sensor	1/2.7" CMOS Sensor
Field of View	170x360 Degrees
Warranty	2 Years (Manufacturing Defect)

Lighting	
LED Ring	7 Ultra-Bright CREE™ LED's
Brightness Settings	3 Adjustable Brightness Levels

Pressure Rating/Deployment Depth/Operating Temperature	
IP68	Up to 300m/1000ft Total Submergence for Unlimited Time
Maximum Deployment Depth	Unlimited Deployment Depth from Datum, as Long as Total Submergence Does Not Exceed Pressure and Temperature Rating
Operating Temperature	-20°C to 60°C (-4°F to 140°F)

Specifications are subject to change without notice

## User Interface

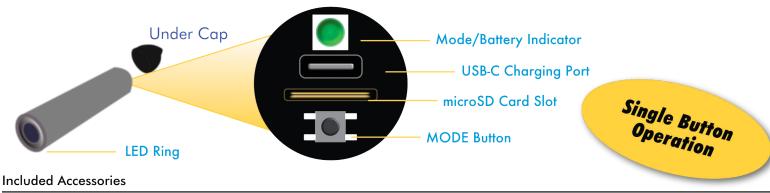

## microSD 0 #2 Phillips Replacement Screwdriver Centralizer Wall Charger Screws/O-Rings/Nuts microSD Rugged Storage/Carry Case Adapter USB-C Camera Probe Centralizer for 4" & Charging Cable 75m/250ft Deployment Cord 6" Ø Holes