



The Typhoon pump is capable of pumping up to 50 feet from ground level to water level by simply connecting it to a 12 volt battery. Its reliable design is suitable for continuous sampling or purging of groundwater wells.

Simplify and Expedite Your Next Sampling Event!

The Typhoon can pass sand, small rocks and debris without getting clogged or damaging the pump motors!

The Typhoon can run continuously without the need for a cool down! Unlike, the competition.

The Typhoon can also run dry for up to two hours without motor damage!

The Typhoon has a 400 hour motor life! That is twice as long as the competition!

The Typhoon has a sleek outside that minimizes well hang-ups.

The Typhoon is a very reliable and economical pump that provides a great bang for your buck!


The Typhoon comes ready for field use; with 60 feet of heavy duty wire and alligator battery clamps and it is shipped in its own box.

SPECS:

POWER CONSUMPTION:	105 WATTS (MAX)
VOLT RECOMMENDATION:	12 - 15 At Source
MAXIMUM AMP OUTPUT:	7 AMPS
MEASUREMENTS:	LENGTH 9.5" / DIAMETER: 1.8"
CONSTRUCTED:	PVC PLASTIC & STAINLESS STEEL
DISCHARGE OUTLET:	3/8" ID OR 1/2" ID POLY TUBING CAN BE USED
SUPPLIED WITH:	60 FEET OF HEAVY DUTY 12 GAUGE WIRE / BATTERY CLAMPS

Did you know??
 The Typhoon can be used for Low Flow Sampling???

CLICK HERE

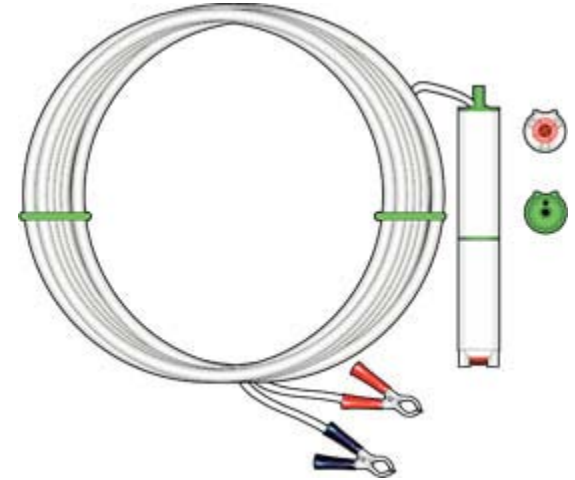

Typhoon Pump Chart	
PUMPING DEPTH (DTW)	GALLONS PER MINUTE
3	3.0
10	2.3
20	2.0
30	1.0
40	.6
50	.25
60	N/A