



The Tempest pump is capable of pumping up to 55 feet from ground level to water level by simply connecting it to a 12 volt battery. Its reliable design is suitable for continuous sampling or purging of groundwater wells.

***Simplify and Expedite Your Next Sampling Event!***

The Tempest can pass sand, small rocks and debris without getting clogged or damaging the pump motors!

The Tempest can run continuously without the need for a cool down! Unlike, the competition.

The Tempest can also run dry for up to two hours without motor damage!

The Tempest has a 400 hour motor life! That is twice as long as the competition!

The Tempest has a sleek outside that minimizes well hang-ups.

The Tempest is a very reliable and economical pump that provides a great bang for your buck!


The Tempest comes ready for field use; with 70 feet of heavy duty wire and alligator battery clamps and it is shipped in its own box.

**SPECS:**

POWER CONSUMPTION:	180 WATTS (MAX)
VOLT RECOMMENDATION:	12 - 15 At Source
MAXIMUM AMP OUTPUT:	11 AMPS
MEASUREMENTS:	LENGTH 14.5" / DIAMETER: 1.8"
CONSTRUCTED:	PVC PLASTIC & STAINLESS STEEL
DISCHARGE OUTLET:	3/8" ID OR 1/2" ID POLY TUBING CAN BE USED
SUPPLIED WITH:	70 FEET OF HEAVY DUTY 12 GAUGE WIRE / BATTERY CLAMPS

**Did you know??**  
 The Tempest can be used for Low Flow Sampling???

**CLICK HERE**

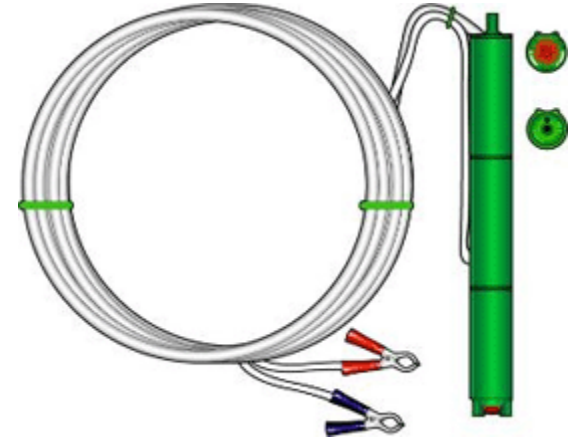

<b>PUMPING DEPTH (DTW)</b>	<b>GALLONS PER MINUTE</b>
3	3.2
10	2.8
20	2.2
30	1.75
40	1.20
55	.25
60	N/A