

NOTICE


PROPER POLARITY AND VOLTAGE IS CRITICAL FOR OPERATION.

RED TO +POSITIVE **BLACK TO -NEGATIVE**

DRIVER REQUIRES VOLTAGE SOURCE OF: 11-12VDC.

AMBIENT TEMPERATURE LIMIT IS: 114°F

USING OUTSIDE THESE LIMITS CAUSES OVERHEAT / SHUTDOWN.

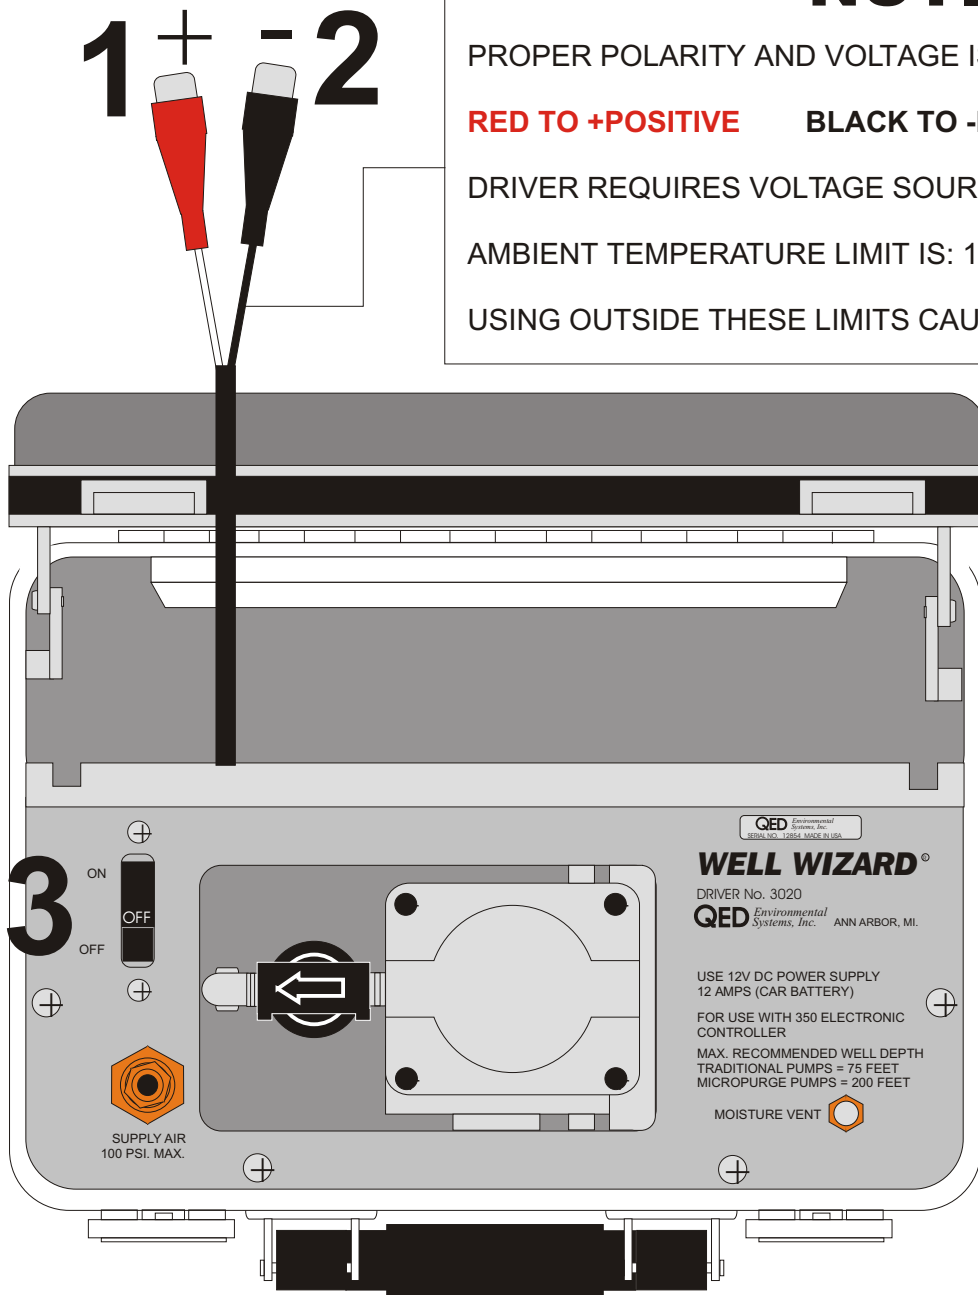

1. Attach Red Positive (+) cable clamp to the Positive (+) terminal of battery.
2. Attach Black Negative (-) cable clamp to the Negative (-) terminal of battery.
3. Turn the On/Off switch on the Model 3020 to the "On" position.