

# Makita<sup>®</sup>

# 2.5 HP HIGH PRESSURE AIR COMPRESSOR

**MAKITA HIGH PRESSURE COMPRESSOR TECHNOLOGY DELIVERS 400 PSI CAPACITY**

**1,720 RPM Enables Greater Displacement at Lower RPM and Lower Noise**

**Oil-less Pump Designed for Maintenance-Free Operation**

**High Pressure 1.6 Gallon Tank Provides the Same Capacity as a Conventional 5 Gallon Tank at 120 PSI**

**Roll Cage and Kick Plate Construction to Withstand Extreme Jobsite Environments**


**Large Rubberized Bumpers for Added Durability**

**Large Regulator Knobs for Easier Adjustments**




**Model  
AC310H**

## POWER

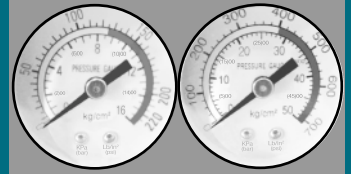

Delivers 3.6 CFM at 90 PSI for conventional nailers and 2.7 CFM at 300 PSI for high pressure nailers

## PERFORMANCE

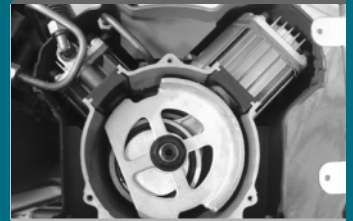

Dual-head (2-stage) pump provides faster recovery time and improved performance

## EFFICIENCY



Low amp draw reduces incidences of tripped breakers and voltage drop during start-ups

## DURABILITY



Four-pole induction motor for increased efficiency and added durability

# INNOVATIVE TECHNOLOGY.

# 2.5 HP HIGH PRESSURE AIR COMPRESSOR

## Model AC310H

### FEATURES & BENEFITS

- Makita high pressure compressor technology delivers 400 PSI capacity for the next generation of high pressure nailers
- Dual capacity: two universal couplers for conventional nailers (3.6 CFM at 90 PSI) and two couplers for high pressure nailers (2.7 CFM at 300 PSI)
- Low amp draw reduces incidences of tripped breakers and voltage drop during start-ups
- Efficient dual-head (2 stage) pump provides faster recovery time and improved performance
- 1,720 RPM enables greater displacement at lower RPM and lower noise
- Four-pole induction motor for increased efficiency and added durability
- Oil-less pump designed for maintenance-free operation
- High pressure 1.6 gallon tank provides the same capacity as a conventional 5 gallon tank at 120 PSI
- Roll cage and kick plate construction to withstand extreme jobsite environments
- Large rubberized bumpers for added durability
- Large regulator knobs for easier adjustments

### STANDARD EQUIPMENT

- 2 regular pressure universal couplers (HY00000337)
- 2 high pressure couplers (HY00000351)

### SPECIFICATIONS

Motor	2.5 HP
Pump	Oil-less
Tank	1.6 gal.
Performance	40 PSI (3.7 CFM) 90 PSI (3.6 CFM) 300 PSI (2.7 CFM)
Maximum pressure	400 PSI
Dimensions (LxWxH)	18-3/4" x 14-3/4" x 20"
Net weight	79.4 lbs.
Shipping weight	88.1 lbs.
UPC Code	088381-096928

### OPTIONAL ACCESSORIES


- 50' high pressure contractor hose (B-80014)
- 100' high pressure contractor hose (B-80020)
- Wheel kit for AC310H (HY00000212)



High pressure hose



Wheel kit

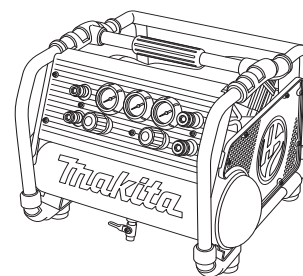

Model AC310H



Makita offers a wide variety of Air Compressors and accessories. For a complete listing, please refer to the Makita General Catalog, visit our website at [makitatools.com](http://makitatools.com), or call 1-800-4MAKITA.

All specifications subject to change without prior notice. All models and accessories subject to stock on hand.  
NTF-0809-400M MA-0634-09

**Makita**<sup>®</sup>  
Makita U.S.A., 14930 Northam St., La Mirada, CA 90638